


**Description:** GSM Wireless Payphone MW-18PCO

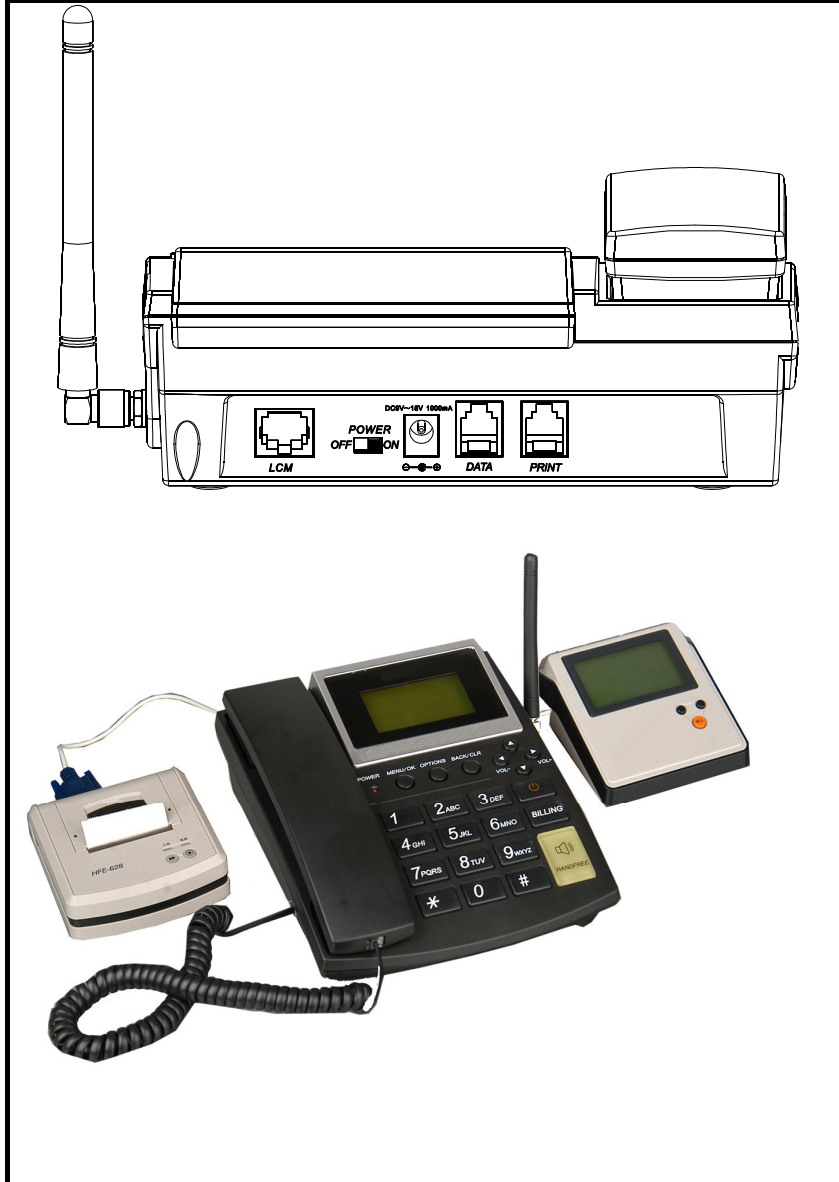

1. Support GSM 900/1800MHz automatically
2. Caller ID
3. Dot-matrix display with English display
4. SMS function
5. IP No. setting
6. Software upgrade jack
7. Data serve, Support GPRS. Connect PC via USB port, optional with extra cost
8. Call in / Call out /Call divert/ Call waiting limitation function
9. Lock up function: SIM card, cell and network
10. Local No. / direct No. / limited No. setting
11. Speed dial function
12. Redial function
13. Support three-way conference call
14. Save more than 100 SMS on the phone
15. 7-level headphone volume and silence adjustable
16. Speaker Phone
17. Low-power indicator
18. Storage 20 missed call or received calls and the last ten dialed number
19. Voice mail function
20. Support STK1114
21. Emergency call: at off-hook or hand-free state, can calling emergency number without any card
22. SMA connector
23. Speedy recharge function: store 70% capacity in two hours
24. support PCO function,Billing mode setting(Prepaid mode and Postpaid mode)
25. support External printer and remote display
26. 128\*64 big sized LCD module with blacklit led
27. Four line display and each line can show 20 characters
28. Support OTA . Control machion and revise parameter by remotly
29. Support to setup parameters by keys, PC and SMS

1	Colors:	optional
2	Net Weight (Kg):	0.91Kg

**Technical Parameter**

**Operating Requirements**

3	Gross Weight (Kg)	1.21Kg		
4	Piece by Carton:	10		
5	Packing Size (mm)	384*251*312mm/CTN		
External PrinterPort	RJ-11*1		Software update jack	RJ-11*1
External LCM Port	RJ-45*1		power supply	220v
Solution	ADI		CID standard:	Yes

- 1 Normal operation temperature:-30° C ---70° C
  - 1 Restricted operation temperature: -30° C ---80° C
  - 1 Storage temperature: -40° C ---85° C
  - 2 Enviroment noise: below 60dB(A)
  - 3 Relative humidity:10%~95%
  - 4 Atmosphere pressure:86~106KPa
  - 5 Support for software upgrade on line
  - 6 AC power voltage:220V±22V, Freq. :50Hz
  - 6 GPRS multi-slot class 10/8
  - 7 GPRS mobile station class B
  - 8 Compliant to GSM phase 2/2+
  - 8 -Class 4(2W)850/900MHz
  - 8 -Class 1(1W)1800/1900MHz
  - 9 Control via AT commands  
(GSM 07.07,07.05 and SIMCOM enhanced AT Commands)
  - 10 Phone: DC 9V-15V 1000mA
  - At minimum 6V can work not charging, In normal DC input voltage range is 9V~24V
  - Battery: 3,6V 1300mAH Ni-MH rechargable battery(accessory)
  - 11 1.With battery , standby time is more than 72h
  - 11 2.With battery, Call time is more than 4h
- Technology Parameter**
- 1 Operating Freq.:850/900/1800/1900MHz automatically switch
  - 2 Support SIMCard 1.8V/ 3V
  - 3 Channel interval:200KHz
  - 4 Receive sensitivity:<-100dBm
  - 5 Freq. error:<=0.1ppm